

08-03. 00

17

PTO/SB/05 (2/98)

Approved for use through 09/30/2000. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Please type a plus sign (+) inside this box → ☐

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No.	4015-668
First Inventor or Application Identifier	Vance et al.
Title	CAMERA DEVICE WITH SELECTABLE IMAGE PATHS
Express Mail Label No.	EL634190129US

(Only for new nonprovisional applications under 37 CFR § 1.53(b))

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ *Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 19]
(preferred arrangement set forth below)
 - Descriptive title to the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 10]
4. ☒ Oath or Declaration [Total Pages 4]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a
copy of the oath or declaration is supplied under Box 4b,
is considered as being part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☒ 37 C.F.R. § 3.73(b) Statement ☒ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure ☒ Copies of IDS
Statement (IDS)/PTO-1449 Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ *Small Entity ☐ Statement filed in prior application,
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

***NOTE FOR ITEMS 1 & 14: IN ORDER TO BE
ENTITLED TO PAY SMALL ENTITY FEES, A SMALL
ENTITY STATEMENT IS REQUIRED (37 C.F.R.
§ 1.27), EXCEPT IF ONE FILED IN A PRIOR
APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary statement:


<input type="checkbox"/> Continuation	<input type="checkbox"/> Divisional	<input type="checkbox"/> Continuation-in-part (CIP)	of prior application No: _____/ _____
Prior application information:		Examiner:	Group/Art Unit:

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label  or ☐ Correspondence address below
(Insert Customer No. or Attach bar code label here)

24112

NAME	PATENT TRADEMARK OFFICE			
ADDRESS				
CITY	STATE	ZIP CODE		
COUNTRY	TELEPHONE	FAX		

Name (Print/Type)	David E. Bennett	Registration No (Attorney/Agent)	32,194
Signature		Date	August 2, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Express Mail Label No.: EL634190129US

Date Mailed: August 2, 2000

**UNITED STATES PATENT APPLICATION
FOR GRANT OF LETTERS PATENT**

**Scott Vance
Charles Hunt
INVENTORS**



**CAMERA DEVICE WITH SELECTABLE
IMAGE PATHS**

COATS & BENNETT, P.L.L.C.

P.O. Box 5
Raleigh, NC 27602
(919) 854-1844

CAMERA DEVICE WITH SELECTABLE IMAGE PATHS

BACKGROUND OF THE INVENTION

The present invention relates generally to camera devices and, more particularly, to a
5 camera device having first and second selectable image paths.

Camera phones, which comprise a mobile, hand-held telephone and a digital camera in
the same physical package, have recently been introduced to the market. At present, the
development of digital camera phones is in its infancy. Wideband Code Division Multiple
Access (WCDMA) and other emerging technologies will soon make it possible to send digital
10 images and live video over wireless communication networks. These emerging technologies
will spawn a new breed of camera phones that can be used for teleconferencing or for recording
video that can be transmitted over the wireless communications network.

When recording video, the user generally likes to see the image being recorded. In
modern video cameras, the image seen through the lens of the camera is presented on a liquid
15 crystal display. The display is typically oriented to face the opposite direction of the lens so that
the user can use the display as a viewfinder to view the image being recorded. However, when
the user is participating in a video conference, a display facing in the same direction as the lens
is needed so that the user can see the other parties while transmitting the user's own image.
Modern video cameras solve this problem by mounting the display on a swivel so that it can be
20 rotated to face in either direction. While it is technically feasible to make a display for a camera
phone that can swivel, that is not a very practical solution for a camera phone. Color displays
have numerous connections that would require use of a flexible connector. If a flexible
connector is used, the display would need to swivel in one direction to move from position A to
position B, and in the opposite direction to move back from position B to position A. Also the
25 design of the flex is difficult to implement and is often unreliable.

SUMMARY OF THE INVENTION

The present invention relates to camera devices, such as a digital camera or camera phone, having first and second selectable image paths. The camera device comprises a housing having a first light aperture formed in a front side of the housing and a second light aperture formed in the back side of the housing. An image sensor is disposed within the housing for converting images formed by light on the image sensor into raw image data. The raw image data is processed by an image processor to produce formatted image signals for output to a display or for transmission by a transceiver. An optical system selectively directs light along either the first or second image paths onto the image sensor. In an exemplary embodiment, the optical system comprises a rotatable or slidable mirror assembly. When the rotatable mirror assembly is in a first position, light entering housing through the first light aperture is directed along the first image path to the image sensor. When the mirror assembly is in the second position, light entering through the second light aperture is directed along a second image path to the image sensor.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of an exemplary camera device according to the present invention.

Figure 2 is a perspective view of the camera device as seen from the front.

Figure 3 is a perspective view of the camera device as seen from the back.

Figure 4 is a perspective view showing one embodiment of a mirror assembly used in the camera device.

Figure 5 and 6 are schematic illustrations showing the mirror assembly in the forward-looking and rearward-looking positions respectively.

Figure 7 is a perspective view showing an alternate embodiment of the mirror assembly including a lens cover.

Figures 8 and 9 are schematic diagrams showing variation of the first embodiment of the camera device with two fixed lenses.

5 Figure 10 is a perspective view showing a second exemplary embodiment of the camera device.

Figure 11 is a perspective view showing the mirror assembly used in the second embodiment of the camera device.

10 Figure 12 is a perspective view showing a third exemplary embodiment of the camera device.

Figure 13 is a perspective view showing the mirror assembly used in the third embodiment of the camera device.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 Figure 1 is a block diagram of an exemplary camera device indicated generally by the numeral 10. The exemplary embodiment of the camera device comprises a camera phone, which is used as an example to describe one application of the invention. The present invention is not, however, limited to a camera phone. The present invention may be embodied in other camera devices including without limitation a digital camera, a mobile terminal, or other devices
20 incorporating a camera. Mobile terminals may include cellular radiotelephones, personal communication services (PCS) devices, personal digital assistants (PDAs), laptop computers, and palm-top computers.

The camera phone 10 comprises a microprocessor 12, program memory 14, input/output circuit 16, transceiver 18, audio processing circuit 20, user interface 22, image
25 sensor 32, image processor 34, and optical system 50. Microprocessor 12 controls the

operation of the camera phone 10 according to programs stored in program memory 14.

Input/output circuits 16 interface the microprocessor 12 with the user interface 22, transceiver 18, audio processing circuit 20, and image processing circuit 34. User interface 22 comprises a keypad 24, display 26, microphone 28, and speaker 30. Keypad 24 allows the operator to dial
5 numbers, enter commands, and select options. The display 26 allows the operator to see dialed digits, call status, and other service information. Microphone 28 converts the user's speech into electrical audio signals, and speaker 30 converts audio signals into audible signals that can be heard by the user. Audio processing circuit 20 provides basic analog output signals to the speaker 30 and accept analog audio inputs from the microphone 28. Transceiver 18 is coupled
10 to an antenna 36 for receiving and transmitting signals.

Image sensor 32 captures images formed by light impacting on the surface of the image sensor 32. The image sensor 32 may be any conventional image sensor 32, such as a charge-coupled device (CCD) or complementary metal oxide semiconductor (CMOS) image sensor. Image processor 34 processes raw image data collected by the image sensor 32 for
15 subsequent output to the display 26 or for transmission by the transceiver 18. The image processor 34 is a conventional signal microprocessor programmed to process image data, which is well known in the art.

Figures 2 and 3 are perspective views illustrating an exemplary embodiment of the camera phone 10. The camera phone 10 includes a housing 40, which in the disclosed
20 exemplary embodiment has a front cover 42 and a back cover 44. The keypad 24, display 26, microphone 28, and speaker 30 are disposed in the front cover 42. The front cover 42 further includes a first light aperture 46 disposed above the display 26, which faces in the same direction as the display 26. Back cover 44 includes a second light aperture 48, which faces in the opposite direction of the display 26. As will be described more fully below, the first and

second light apertures 46, 48 allow the camera phone to look forwardly, e.g. the same direction as the display 26, or rearwardly, e.g. the opposite direction of the display 26.

Contained within housing 40 is a printed circuit board 38 which contains the electronic components of the camera phone 10 such as the microprocessor 12, memory 14, I/O circuits 16, transceiver 18, audio processing circuit 20, and image processing circuit 34. Image sensor 32 is also typically mounted to printed circuit board 38.

Figure 4 is a perspective view illustrating the optical system 50 in the exemplary embodiment. The function of the optical system 50 is to selectively direct light along either a first image path or a second image path to the image sensor 32. The optical system 50 comprises an objective lens 54, a double-sided movable mirror 56, and a stationary mirror 58. The objective lens 54 and movable mirror 56 are part of a rotating mirror assembly 52. Mirror assembly 52 includes, in addition to the objective lens 54 and movable mirror 56, a spherical housing 60 mounted on a shaft 62. A ring 64 is disposed on the outer end of the shaft 62, which extends through the housing 40. Ring 64 provides a means for the user to rotate the mirror assembly 52. Those skilled in the art will recognize that the element for rotating the mirror assembly 52 may be located in the front, back, or sides of housing 40 and that a variety of different elements could be used. Mirror assembly 52 is held by a spring clip 66 that engages a pair of flat surfaces 68 on shaft 62 of the mirror assembly 52. The flat surfaces 68 function as an index mechanism to yieldably station the mirror assembly 52 at the forward-looking and rearward-looking positions as described more fully below.

Spherical housing 60 of mirror assembly 52 contains a cavity 66 having two openings – an entry opening 70 and exit opening 72. The axis of entry opening 70 is disposed perpendicular to the axis of shaft 62 so that the orientation of entry opening 70 changes when shaft 62 is rotated. The axis of exit opening 72 is coincident or parallel to the axis of shaft 62 so that exit opening 72 remains oriented in the same direction regardless of the angular position of

shaft 62. Objective lens 54 is mounted within or adjacent the entry opening 70. Movable mirror 56 is positioned within cavity 66 so that light entering through entry opening 70 is reflected out through exit opening 72. Light reflected out of the mirror assembly 52 is then reflected by stationary mirror 58 onto the surface of the image sensor 32, which is mounted to the printed circuit board 38.

The rotating mirror assembly 52 allows the objective lens 54 and movable mirror 56 to move between at least first and second positions. Equivalently, the objective lens 54 and movable mirror 58 could be mounted for sliding movement between first and second positions. In the first position, shown in Figure 5, light entering through the first light aperture 46 is directed along a first image path to the image sensor 32. In the second position, shown in Figure 6, light entering through the second light aperture 48 is directed along a second image path to the image sensor 32.

Figures 5 and 6 are schematic illustrations showing the operational positions of the mirror assembly 52. Light from an object is directed along either a first or second image path depending on the position of mirror assembly 52. Image sensor 32 picks up the reflected light and converts the reflected light to raw image data. The raw image data is processed by image processor 34 to provide an image signal which can be formatted for output to the display 26 or for transmission by the transceiver 18.

Figure 5 illustrates the mirror assembly 52 in the forward-looking position. Light enters the housing 40 (not shown in Figures 5 and 6) through the first light aperture 46 and passes through the objective lens 54. Movable mirror 56 reflects the light through the exit opening 72 in the lens housing 60 in the direction of the stationary mirror 58. Stationary mirror 58 reflects light exiting lens housing 60 onto the image sensor 32. The path illustrated in Figure 5 is referred to herein as the first image path.

In Figure 6, the mirror assembly 52 is rotated 180° from the position shown in Figure 5 to the rearward-looking position. In this position, light enters housing 40 through the second light aperture 48, passes through the objective lens 54, is reflected by movable mirror 56 through exit opening 72, and finally is reflected by stationary mirror 58 onto the image sensor 32. In this case, the image formed on the image sensor 32 will be inverted as compared to the image formed when the mirror assembly 52 is in the forward-looking position. A position sensor 80 detects the position of the mirror assembly 52 and generates a position signal that is input to the image processor 34. Based on the input from the position sensor 80, the image processor 34 inverts image so that the displayed image is correct.

A variety of different techniques can be used to detect the position of the mirror assembly 52. In the exemplary embodiment of Figure 4, the position sensor 80 comprises a wiper contact 82 disposed on the shaft 62 of the mirror assembly 52. When the mirror assembly 52 is rotated to the rearward-looking position, the wiper contact 82 on the shaft 62 makes an electrical connection between two spaced-apart contacts 84 on the printed circuit board 38 and causes a signal to be generated indicative of the position of the mirror assembly 52. In this example, the signal is a voltage signal. Those skilled in the art will recognize that many other ways exist to detect position of the mirror assembly 52. Instead of a wiper contact 82, a mechanical switch actuated by rotation of the mirror assembly 52 could be used to determine the position of the mirror assembly 52. Also, there are many different types of non-contact position sensors 80 that can be used to detect the position of the mirror assembly 52, including capacitance sensors, inductance sensors, Hall-effect sensors, magnetic sensors, and optical sensors.

The camera phone 10 of the present invention can be used for video conferencing or as a conventional video camera. For teleconferencing, the mirror assembly 52 is oriented so that the lens faces forward, i.e., in the same direction as the display 26. In this orientation, the

user's image is transmitted while the user talks on the camera phone 10. At the same time, the user can view the image being transmitted from the person at the other end of the call. To use the camera phone 10 as a video camera, the mirror assembly 52 is rotated to the rearward-looking position, i.e., facing away from the display 26. In this position, the user can use the camera phone 10 to record video images while using the display 26 as a viewfinder. In a preferred embodiment, a button 86 on the camera phone 10 allows the user to turn imaging system on and off.

Figure 7 shows an alternate embodiment of the mirror assembly 52. The embodiment shown in Figure 7 is identical to the embodiment of Figure 4 but with the addition of a lens cover 90. Lens cover 90 serves to cover the objective lens 54 when not in use. Lens cover 90 is semi-spherical in form and conforms to the outer surface of spherical housing 60. A small pin 92 extends outward from the spherical housing 60. When the objective lens 54 is not in use, the mirror assembly 52 is rotated so that the objective lens 54 is covered by lens cover 90. The lens cover 90 can be rotated to cover either the first light aperture 46 or second light aperture 48. In Figure 7, the lens cover 90 is covering the second light aperture 48. To move the lens cover 90 so as to conceal the first light aperture 46, the user rotates the mirror assembly 52 in either direction until pin 92 engages the edge of lens cover 90 and then continues to rotate the mirror assembly 52. Once pin 92 engages the lens cover 90, the lens cover 90 rotates with the remainder of the mirror assembly 52. The same procedure is followed to rotate the lens cover 90 back to the position shown in Figure 7.

As an alternative to a rotating lens cover 90, the housing 40 of the camera phone 10 may include movable shutters or other covers. Also, a separate lens cover 90 or shutter can be eliminated by proper sizing of the entry opening 70. In this case, the mirror assembly 52 could be rotated such that the objective lens 54 faces sideways and the spherical housing 60 closes both light apertures 46 and 48.

Those skilled in the art will appreciate that many other arrangements of lenses and mirrors are possible for carrying out the present invention. For example, the objective lens 54 in the mirror assembly 52 can be replaced by two stationary objective lenses 54' - one for each light aperture 46, 48 – as shown in Figures 8 and 9. In this variant of the invention, the stationary lenses 54' are fixed. Additional lenses or mirrors could also be used. For example, a focusing lens or special effects lens could be included in the first or second image paths. Also, by positioning the image sensor 32 along the axis of the exit opening 72 of the mirror assembly 52, the stationary mirror 58 could be eliminated. In another variation, the objective lens 54 could be movable between at least first and second positions while using stationary reflecting mirrors.

It is also possible to replace the movable mirror 56 with a series of stationary mirrors and liquid crystal light valves as are commonly used in projection systems. The light valves could be used to selectively block or transmit light entering through the first and second light apertures by applying a voltage to the light valve which alters the transmission characteristics of the light valve. This would increase the total number of parts while eliminating movable parts. The light valves could be activated by a switch or button on the camera phone 10.

Thus, the particular arrangement of mirrors and lenses disclosed herein should not be construed as limiting the invention. The invention encompasses any arrangement of mirrors, lenses, light valves, or other components which allow light to be selectively directed along a plurality of image paths to an image sensor.

Figure 10 is a perspective view illustrating a second embodiment of the camera phone 10 of the present invention. The camera phone 10 of Figure 10 is similar to the embodiment of Figures 1 – 9 and, therefore, similar reference numbers are used to indicate similar parts. In the embodiment shown in Figure 10, a dial 65 is disposed in the front cover 42 of the camera phone 10. Dial 65 is part of a mirror assembly 52' shown in Figure 11. Mirror assembly 52'

includes a shaft 62' and a double-sided reflecting mirror 56'. Dial 65 is connected to one end of shaft 62'. Reflecting mirror 56' is mounted on shaft 62' so as to rotate with shaft 62'. Dial 65 is turned by the user's thumb to rotate the reflecting lens 56' between the first and second positions.

5 Figure 12 is a perspective view of a third embodiment of the camera phone 10. This embodiment is similar to the previous embodiments and, therefore, similar reference numbers are used to indicate similar parts. In the embodiment of Figure, a sliding mirror assembly 60", shown in Figure 13, is used in place of the rotating mirror assembly 60 and 60' of the previous embodiments. Mirror assembly 60" comprises a shaft 62" with a thumb pad 64" at each end thereof and a pair of single-sided reflecting mirrors 56". The single-sided reflecting mirrors 56" are mounted to the shaft 62". Reflecting mirrors 56" are disposed at a 90° angle with respect to one another. The mirror assembly 60" slides along the axis of the shaft 62" as indicated by the arrows in Figure 13 to selectively position the reflecting mirrors 56" in the first and second optical paths, respectively.

10
15 The present invention may, of course, be carried out in other specific ways than those herein set forth without departing from the spirit and essential characteristics of the invention. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive, and all changes coming within the meaning and equivalency range of the appended claims are intended to be embraced therein.

CLAIMS

What is claimed is:

1. A combination mobile terminal and camera comprising:
 - a housing having a first light aperture formed in a first side of said housing and a second light aperture formed in a second side of said housing;
 - a wireless transceiver disposed within said housing for transmitting and receiving signals;
 - an image sensor disposed within said housing for converting images formed by light on said image sensor into electrical signals;
 - an optical system for selectively directing light passing through said first and second light apertures onto said image sensor; and
 - an image processor coupled to an output of said image sensor for processing electrical signals from said image sensor to produce image signals.
2. The combination mobile terminal and camera of claim 1 wherein said optical system comprises a mirror assembly having at least one movable mirror, said mirror assembly being movable between a first position to direct light entering through said first light aperture along a first image path onto said image sensor and a second position to direct light entering through said second light aperture along a second image path onto said image sensor.
3. The combination mobile terminal and camera of claim 2 wherein said mirror assembly comprises at least one movable mirror rotatable between at least first and second positions.

4. The combination mobile terminal and camera of claim 3 wherein said movable mirror directs light entering through said first light aperture along a first image path onto said image sensor when disposed in a first position and directs light entering through said second light aperture along said second image path onto said image sensor when disposed in a second position.

5. The combination mobile terminal and camera of claim 2 wherein said mirror assembly comprises at least first and second movable mirrors.

6. The combination mobile terminal and camera of claim 5 wherein said first and second movable mirrors slide between a first position and a second position.

7. The combination mobile terminal and camera of claim 5 wherein said first movable mirror directs light entering through said first light aperture along said first image path onto said image sensor when said first and second movable mirrors are disposed in said first position and wherein said second movable mirror directs light entering through said second light aperture along said second image path onto said image sensor when said first and second movable mirrors are disposed in said second position.

8. The combination mobile terminal and camera of claim 2 further comprising a position detector to detect the position of said mirror assembly, said image processor being responsive to a signal from said position detector to invert said image when said mirror assembly is in one of said first and second positions.

9. The combination mobile terminal and camera of claim 1 wherein said optical system further comprises at least one lens.

10. The combination mobile terminal and camera of claim 9 wherein said lens is movable between a first position along said first image path to a second position along said second image path.

11. The combination mobile terminal and camera of claim 10 further comprising a movable mirror assembly having at least one movable mirror, said mirror assembly being movable between a first position to direct light entering through said first light aperture along a first image path onto said image sensor and a second position to direct light entering through said second light aperture along a second image path onto said image sensor.

12. The combination mobile terminal and camera of claim 9 comprising a first lens disposed along said first image path and a second lens disposed along said second image path.

13. The combination mobile terminal and camera of claim 12 wherein said first and second lenses are fixed.

14. The combination mobile terminal and camera of claim 1 further comprising a display.

15. The combination mobile terminal and camera of claim 10 wherein said first aperture faces in the direction of said display and said second aperture faces in the direction opposite said display.

16. A camera comprising:

a housing;

a display mounted in said housing;

a first light aperture formed in a first side of said housing and facing in the direction of
said display;

a second light aperture formed in a second side of said housing and facing in a direction
opposite said display;

an image sensor disposed within said housing for converting images formed by light on
said image sensor into electrical signals;

an optical system for selectively directing light passing through said first and second light
apertures onto said image sensor; and

an image processor coupled to an output of said image sensor for processing electrical
signals from said image sensor to produce image signals.

17. The camera of claim 16 wherein said optical system comprises a mirror assembly having
at least one movable mirror, said mirror assembly being movable between a first position to
direct light entering through said first light aperture along a first image path onto said image
sensor and a second position to direct light entering through said second light aperture along a
second image path onto said image sensor.

18. The camera of claim 17 wherein said mirror assembly comprises at least one movable
mirror rotatable between at least first and second positions.

19. The camera of claim 18 wherein said movable mirror directs light entering through said
first light aperture along a first image path onto said image sensor when disposed in said first

position and directs light entering through said second light aperture along said second image path onto said image sensor when disposed in said second position.

20. The camera of claim 17 wherein said mirror assembly comprises at least first and
5 second movable mirrors.

21. The camera of claim 20 wherein said first and second movable mirrors slide between a first position and a second position.

10 22. The camera of claim 20 wherein said first movable mirror directs light entering through said first light aperture along said first image path onto said image sensor when said first and second movable mirrors are disposed in said first position and wherein said second movable mirror directs light entering through said second light aperture along a second image path onto
15 said image sensor when said first and second movable mirrors are disposed in said second position.

20 23. The camera of claim 22 further comprising a position detector to detect the position of said mirror assembly, said image processor being responsive to a signal from said position detector to invert said image when said mirror assembly is in one of said first and second positions.

24. The camera of claim 16 wherein said optical system further comprises at least one lens.

25 25. The camera of claim 24 wherein said lens is movable between a first position along said first image path to a second position along said second image path.

26. The camera of claim 25 further comprising a movable mirror assembly having at least one movable mirror, said mirror assembly being movable between a first position to direct light entering through said first light aperture along a first image path onto said image sensor and a second position to direct light entering through said second light aperture along a second image path onto said image sensor.

27. The camera of claim 24 comprising a first lens disposed along said first image path and a second lens disposed along said second image path.

28. The camera of claim 27 wherein said first and second lenses are fixed.

~~29.~~ A method for selectively displaying images seen through first and second apertures of a camera facing in opposing directions, said method comprising:

providing an movable mirror assembly for selectively directing light entering through said first and second apertures onto an image sensor to capture an image;
positioning said mirror assembly in a first position to direct light entering through said first light aperture along a first image path to capture an image seen through said first light aperture; and
positioning said mirror assembly in a second position to direct light entering through said second light aperture along a second image path to capture an image seen through said second light aperture.

30. The method of claim 27 wherein said mirror assembly comprises a movable mirror and wherein positioning said mirror assembly in said first and second positions comprises moving said mirror between said first and second positions.

5 31. The method of claim 28 wherein said movable mirror is rotatable and wherein moving said movable mirror between said first and second positions comprises rotating said movable mirror between said first and second positions.

32. The method of claim 28 wherein moving said movable mirror between said first and second positions comprises sliding said movable mirror between said first and second position.

10 ~~33.~~ A method of directing multiple images through multiple apertures onto an image sensor comprising:

15 recording a first image by directing the image through a first aperture onto a mirror assembly;

reflecting the first image from the mirror assembly and directing the reflected first image onto the image sensor;

20 recording a second image by directing the second image through a second aperture onto the mirror assembly; and

reflecting the second image from the mirror assembly and directing the reflected second image onto the image sensor.

34. The method of claim 33 wherein the mirror assembly includes a single mirror, and
25 wherein the first and second images are reflected from the single mirror onto the image sensor.

35. The method of claim 34 wherein the single mirror is movable between first and second positions, and wherein in the first position said single mirror aligns with said first aperture, and wherein in said second position said single mirror aligns with said second aperture.

5

36. The method of claim 35 wherein said single mirror is rotatable between said first and second positions.

37. The method of claim 33 wherein said mirror assembly includes first and second mirrors movable between first and second positions, and wherein in said first position said first mirror aligns with said first aperture, and wherein in said second position said second mirror aligns with said second aperture.

10

ABSTRACT OF THE DISCLOSURE

A camera device comprises a housing having first and second light apertures formed in opposing sides of the housing, an image sensor disposed within the housing for converting
5 images formed by light on said image sensor into electrical signals, an image processor coupled to the output of the image sensor for processing raw electrical signals from the image sensor to produce formatted image signals, and an optical system for selectively directing light entering said housing through said first and second light apertures onto said image sensor.

FIG. 1 is a block diagram of a system 10. The system 10 includes an image sensor 32, an image processor 34, a microprocessor 12, memory 14, an I/O block 16, a keypad 24, a display 26, an audio processing circuit 20, a transceiver 18, a position detection unit 80, and an antenna 36. The image sensor 32 is connected to the image processor 34. The image processor 34 is connected to the microprocessor 12. The microprocessor 12 is connected to the memory 14. The microprocessor 12 is connected to the I/O block 16. The I/O block 16 is connected to the keypad 24 and the display 26. The I/O block 16 is connected to the audio processing circuit 20. The I/O block 16 is connected to the transceiver 18. The audio processing circuit 20 is connected to the transceiver 18. The audio processing circuit 20 is connected to a speaker 28 and a microphone 30. The position detection unit 80 is connected to the image processor 34. The antenna 36 is connected to the transceiver 18.

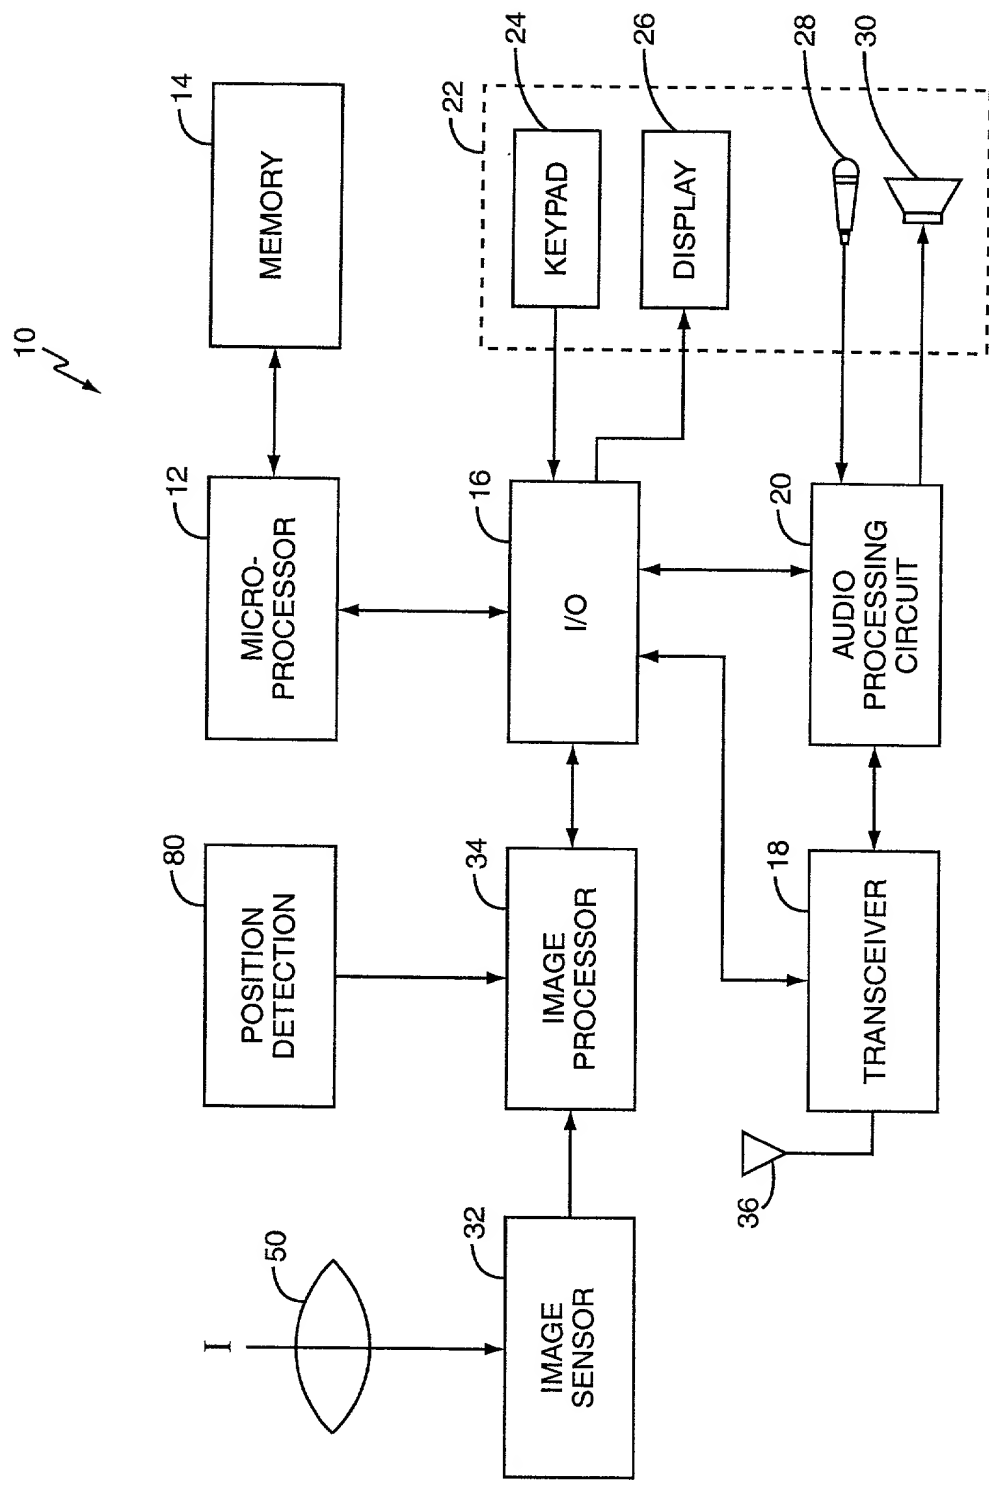


FIG. 1

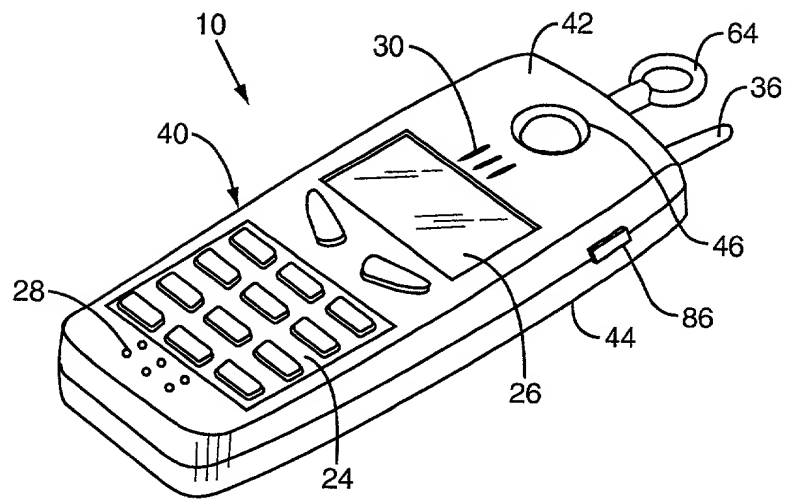


FIG. 2

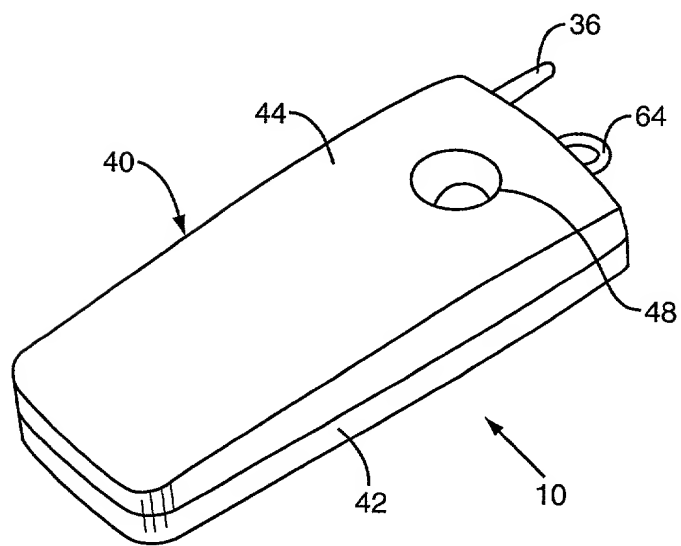


FIG. 3

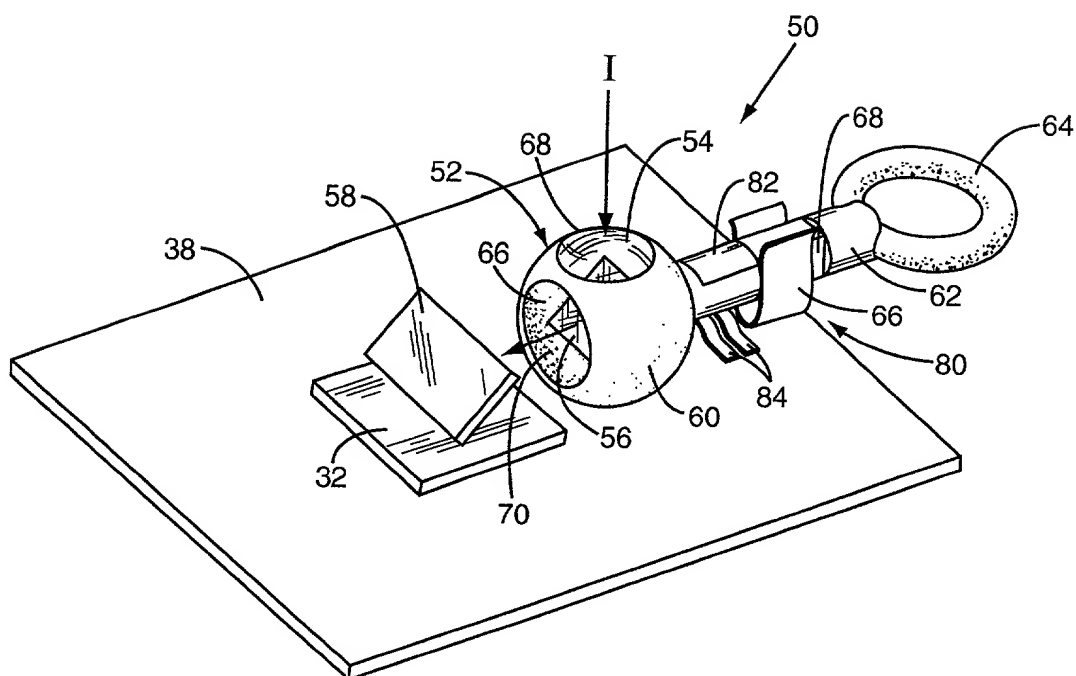


FIG. 4

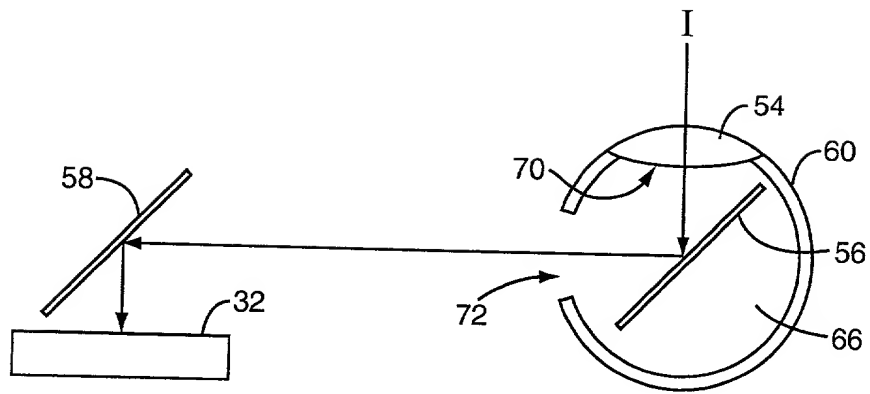


FIG. 5

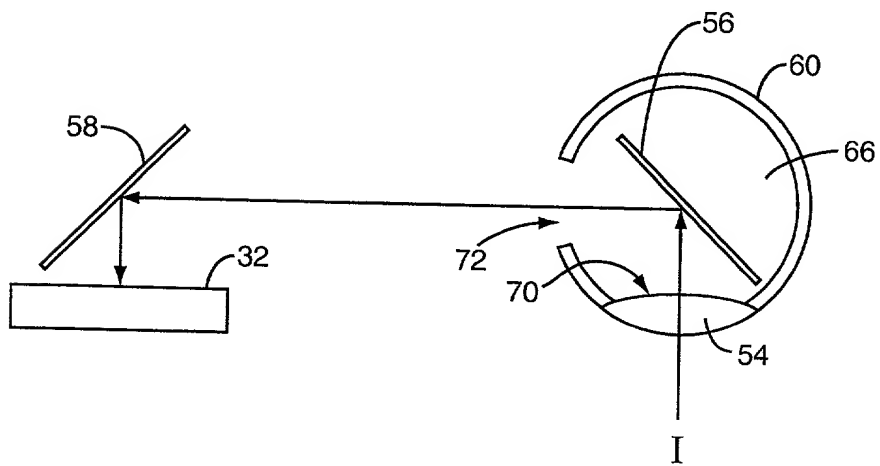


FIG. 6

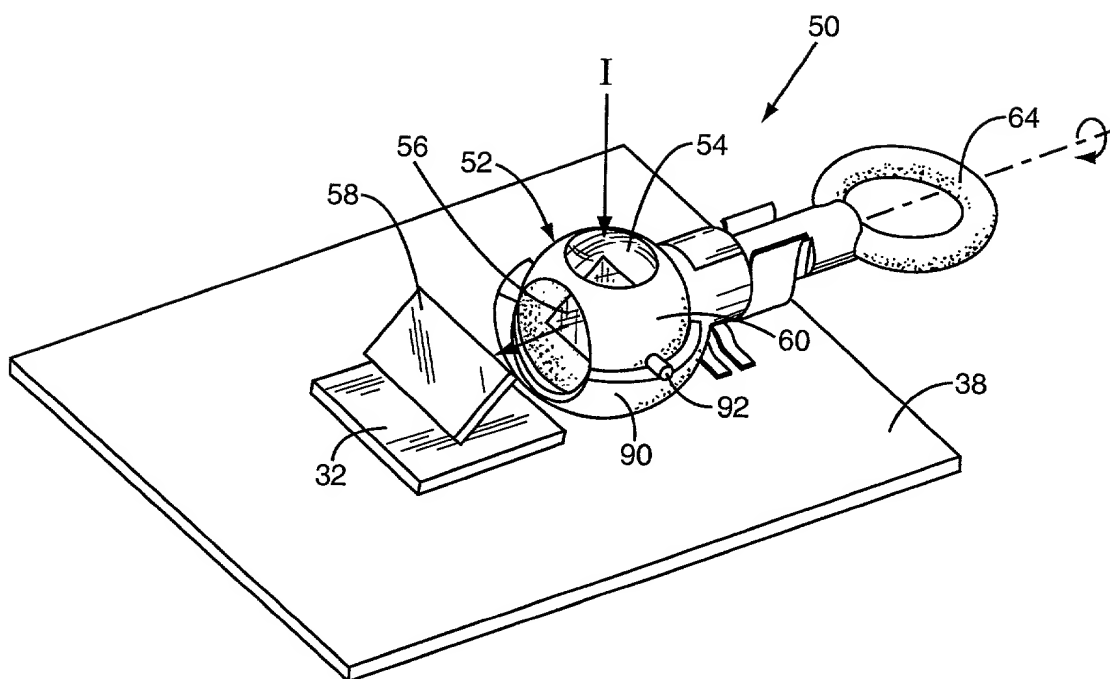


FIG. 7

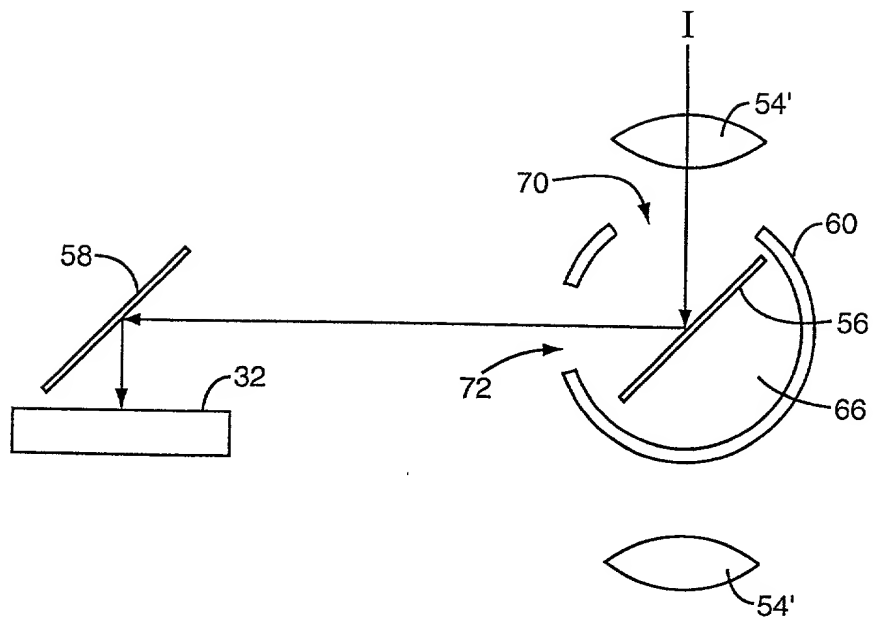


FIG. 8

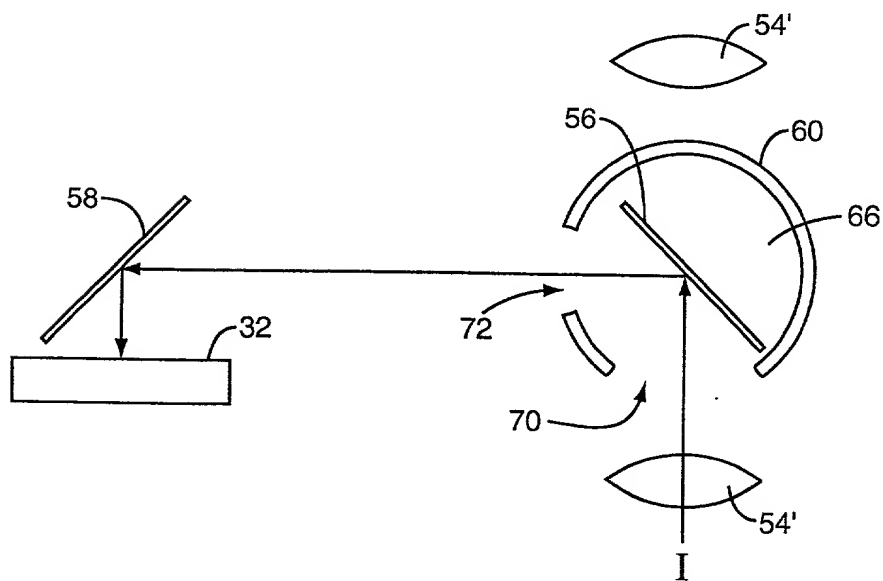


FIG. 9

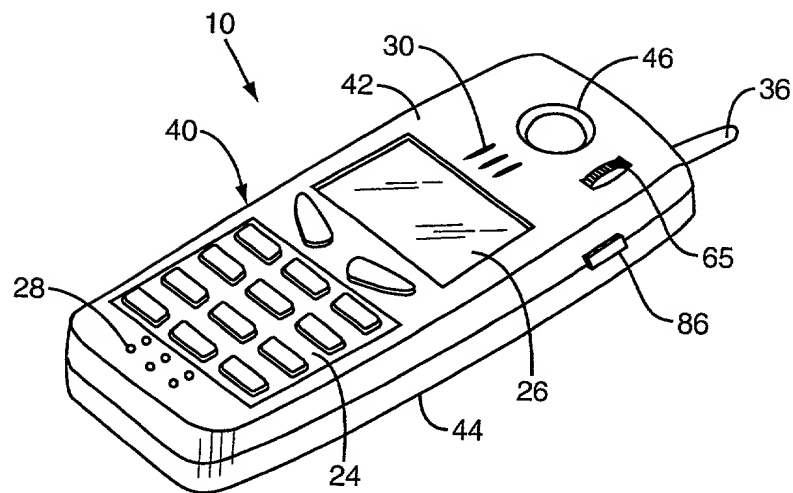


FIG. 10

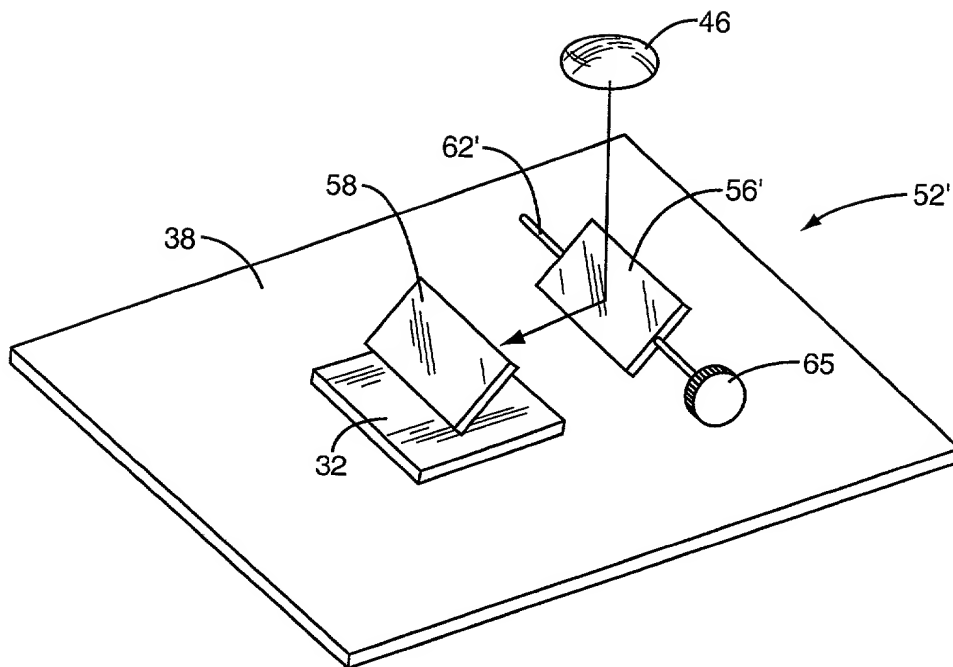


FIG. 11

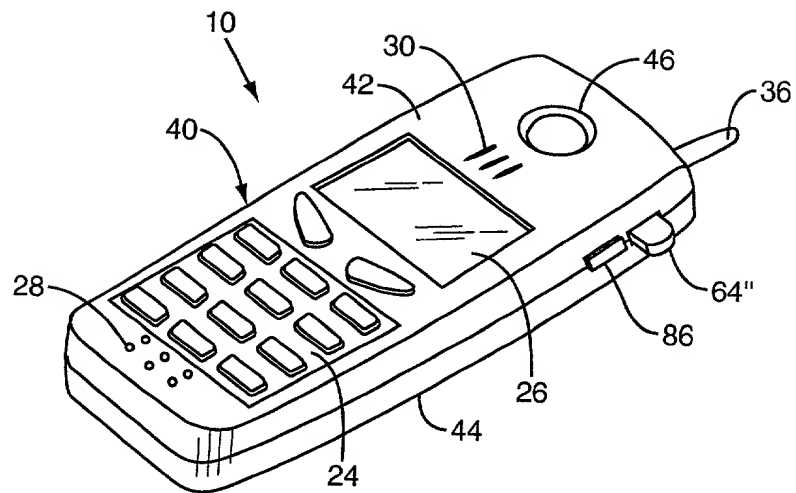


FIG. 12

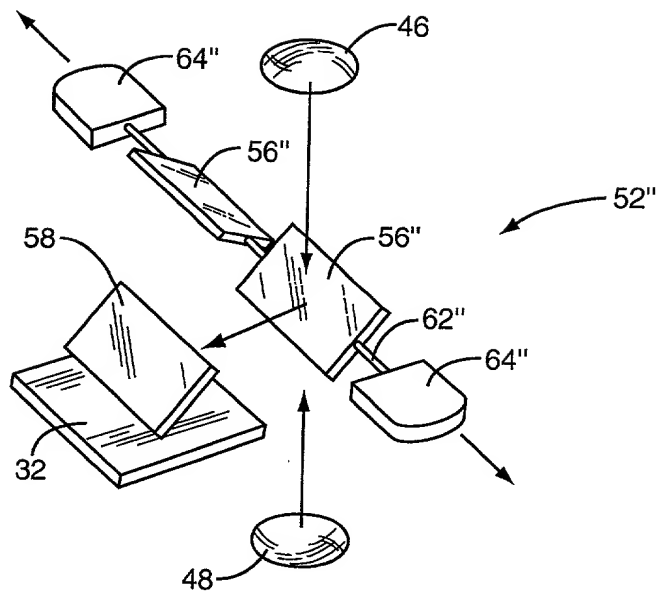


FIG. 13

Declaration and Power of Attorney for Patent Application

As below named inventors, we hereby declare that:

Our residences, post office addresses and citizenships are as stated below next to our names,

We believe that we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled **CAMERA DEVICE WITH SELECTABLE IMAGE PATHS**, the specification of which

☒ is attached hereto.

(Check one)

☐ was filed on _____ as
Application Serial Number _____
and was amended on _____
(if applicable)

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to us which is material to patentability (as defined in C.F.R. §1.56) in connection with the examination of this application.

We hereby claim foreign benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

NONE

(Number)

(Country)

(Day/Month/Year Filed)

☐
YES

☐
NO

(Number)

(Country)

(Day/Month/Year Filed)

☐
YES

☐
NO

(Number)

(Country)

(Day/Month/Year Filed)

☐
YES

☐
NO

Declaration and Power of Attorney for Patent Application

We hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

NONE

(Application Serial No.)

(Filing Date)

(Status: Patented/Pending/Abandoned)

(Application Serial No.)

(Filing Date)

(Status: Patented/Pending/Abandoned)

Power of Attorney: As a named inventor, I hereby appoint the following agents/attorneys to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

David K. Purks
Registration Number 40,133

Debra K. Stephens
Registration Number 38,211

Kevin A. Sembrat
Registration Number 36,673

Mark C. Terrano
Registration Number 40,200

Stephen A. Calogero
Registration Number 41,491

Kermit D. Lopez
Registration Number 41,953

Dennis J. Williamson
Registration Number 32,338

David R. Irvin
Registration Number 42,682

I. Nelson Wakefield
Registration Number 45,190

Thomas M. Croft
Registration Number 44,051

Gary R. Kuhn
Registration Number 44,198

Declaration and Power of Attorney for Patent Application

And I also hereby appoint the Attorneys and Patent Agents of **Coats & Bennett, P.L.L.C.**, as identified by **Customer Number 24112** in the records of the United States Patent and Trademark Office and as updated from time to time, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.



Send Correspondence to: David E. Bennett

Direct Calls to: David E. Bennett

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SOLE OR FIRST INVENTOR:

Full name: Scott L Vance
First Name Middle Name/Initial Last Name

Signature: Scott L Vance Date: 2000-07-28
First Name Middle Name Last Name Year-Month-Day

Residence: Cary, North Carolina, USA
City, State, and Country

Citizenship: US

Post Office Address: 132 Woodland Drive, Cary, North Carolina 27513

Post Office Address: **4604 Pebble Ct., Raleigh, North Carolina 27613**